

热装专用特殊不锈钢

两体式热装刀柄

高精度 · 长寿命 · 降低成本

支持全系列MST热装刀柄定制



刀柄系列

基础刀柄系列





本体 12 型



BT40-SLK12-75




A63-SLK12-75F

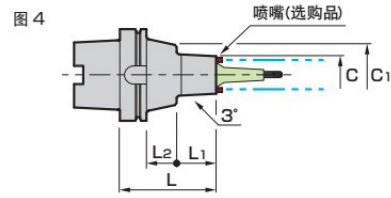

规格	Fig.	L	ØC	L1	L2	ØC1	Kg	N
BT30-SLK12- 35-MAS1	1	35	38	13	-	-	0.4	1
-MAS2								
BT40-SLK12- 45	1	45	38	18	-	-	1.1	1.4
- 45F	2		41					1.6
- 75	1	75	38	48	-	-	1.4	1.8
- 75F	2		41					3.2
- 135F	2	135	41	108			2.2	3.2
BT50-SLK12- 75	1	75	38	25	-	-	4	4.7
- 75F	2		41					4.9
- 105F	2	105	41	55	12	65	4.4	5.3
- 135F		135		85			4.7	5.7
- 225	1	225	38	175	52	-	6.4	14.8
- 315		315		225			11	31.3
A 50-SLK12- 75	3	75	38	49	-	-	0.8	4.8
A 63-SLK12- 75	3	75	38	49	-	-	1	5
- 75F	4		41				1.1	5.5
- 135	3	135	38	109	-	-	1.7	8.5
- 135F	4		41				1.9	8.6
A100-SLK12- 105	3	105	38	43	-	-	3.4	41.3
- 105F	4		41				3.5	41.5
- 135F	4	135	41	73	33	65	3.8	42.2
- 225		225		163			5.4	36.3
- 315	3	315	38	253			6.4	46.5
E 50-SLK12- 75	3	75	38	49	-	-	0.8	2.9
F63M-SLK12- 75	3	75	38	49	-	-	1	3.4
DN40AD- SLK12- 45	1	45	38	13.8	12.1	45	1	4.6
- 45F	2		41	7.9	18			4.3
- 75	1	75	38	43.8	12.1	-	1.3	5.8
- 75F	2		41	55.9	5.5			
DN50AD- SLK12- 75	1	75	38	40	15.9	70	3.4	12.6
- 75F	2		41				3.5	12.3
- 135F	2	135	41	100			4.3	19

支持全系列 MST 热装刀柄定制

SLIMLINE 筒夹 12 型



■备注

- s 是E40-SLK12-45与迷你SLIMLINE热装式筒夹组合使用时的弯曲量。无论同哪种锥柄组合,其数值大致相同。

■注意事项

- 刀具安装...插入刀具时,请务必将刀具插入比安全记号更深的位置。

壁厚

规格	ØD	ØC	t	L	M	L1	ØC1	H	S	N	Kg	h
CR12- 3- 35	3	7.5	2.25	35	22	9.5	9.9	10	2.9	0.5	0.2	60
55				42	12		5.5		80			
80				67	14.6		8.9		105			
CS12- 3- 35	3	6	1.5	35	22	9.5	8.4	10	4.8	0.5	0.2	60
55				42	10.5		9.5		80			
80				67	13.1		15		105			
110				97	16.2		20.6		135			
CR12- 4- 35	4	10	3	35	22	9.5	12.4	12	1.7	0.5	0.2	60
55				42	14.5		3.1		80			
80				67	17.1		5.1		105			
CS12- 4- 35	4	7	1.5	35	22	9.5	9.4	12	3.8	0.5	0.2	60
55				42	11.5		7.5		80			
80				67	14.1		11.9		105			
110				97	17.2		16.6		135			
CR12- 6- 35	6	12	3	35	22	9.5	14.4	18	1.3	0.6	0.2	60
55				42	16.5		2.4		80			
80				67	19.1		3.9		105			
CS12- 6- 35	6	9	1.5	35	22	9.5	11.4	18	2.4	0.5	0.2	60
55				42	13.5		4.9		80			
80				67	16.1		8		105			
110				97	19.2		11.4		135			
CR12- 8- 35	8	14	3	35	22	9.5	16.4	25	1.1	0.6	0.2	60
55				42	18.5		1.9		80			
80				67	21.1		3.1		105			
CS12- 8- 35	8	11	1.5	35	22	9.5	13.4	25	1.6	0.6	0.2	60
55				42	15.5		3.4		80			
80				67	18.1		5.6		105			
110				97	21.2		8.2		135			
CR12- 10- 35	10	16	3	35	22	9.5	18.4	30	0.9	0.7	0.2	60
55				42	20.5		1.6		0.9			
80				67	23.1		2.6		1.1			0.3
CS12- 10- 35	10	13	1.5	35	22	9.5	15.4	30	1.3	0.8	0.2	60
55				42	17.5		2.5		0.9			
80				67	20.1		4.3		1.1			
110				97	23.2		6.2		1.4	0.3		
CR12- 12- 35	12	20	4	35	22	9.5	22.4	30	0.7	0.9	0.2	60
55				42	24.5		1.1		1.1			
80				-	25.5		1.9		1			0.3
CS12- 12- 35	12	15	1.5	35	22	9.5	17.4	30	1	1	0.2	60
55				42	19.5		2.1		1.1			
80				67	22.1		3.5		1.4			
110				-	-		5		1.3	0.3		

支持全系列 MST 热装刀柄定制